

VESSEL

AIR IMPACT WRENCH

ULTRA Light Weight Type

V SERIES

ULTRA LIGHT WEIGHT 1.48 kg

NEW



Protect Boot

Protecting wrench mechanism from outside impact and avoid sudden sharp contact due to this cushion boot.

No. GT-1600VPX


Capacity (Bolt size) 16mm
Square drive 12.7mm (1/2")

Ergonomic Handle

Just fit in your palm grip

Well Grip Balance

Designed for tool center gravity to keep best fatigue free operation in long use.

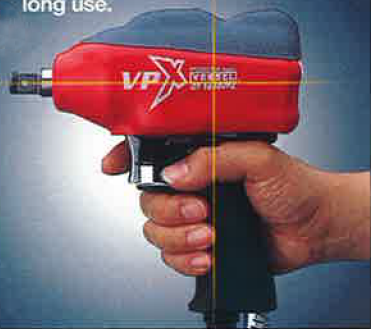

360° Turning Silencer

Adjustable exhaust direction to your choice away from water and oil spread


High Impact Solution

POWERFUL V Hammer



- Higher torque efficiency
- Heavy fastening/releasing
- Compact design for better footwork

Quick and Powerful Tire Wheel Remove/Fastening

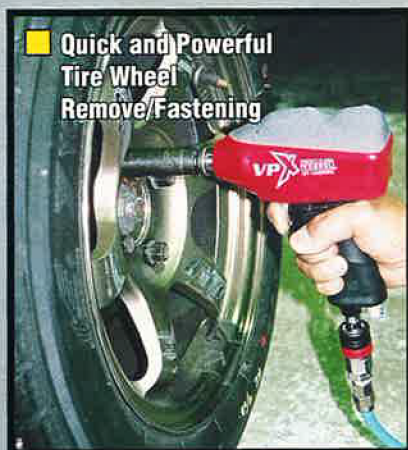


Concrete Frame Application

Ideal for working at box culvert, huge pipe




House Building

Fastening anchor and plate bolt

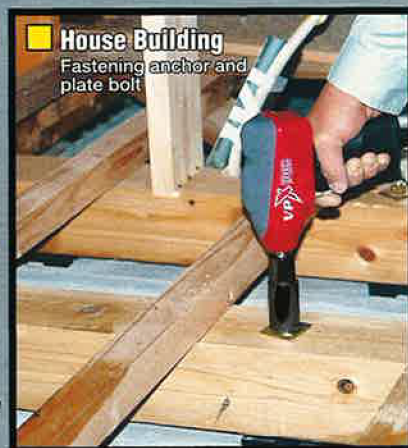

Mold Application

Hard bolts and screws at heavy mold

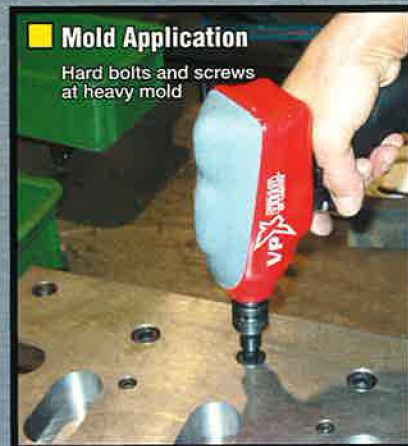


Start lever

Reversible lever


4 Step regulator

Single hand held operation center for accurate operation

■ Wide application

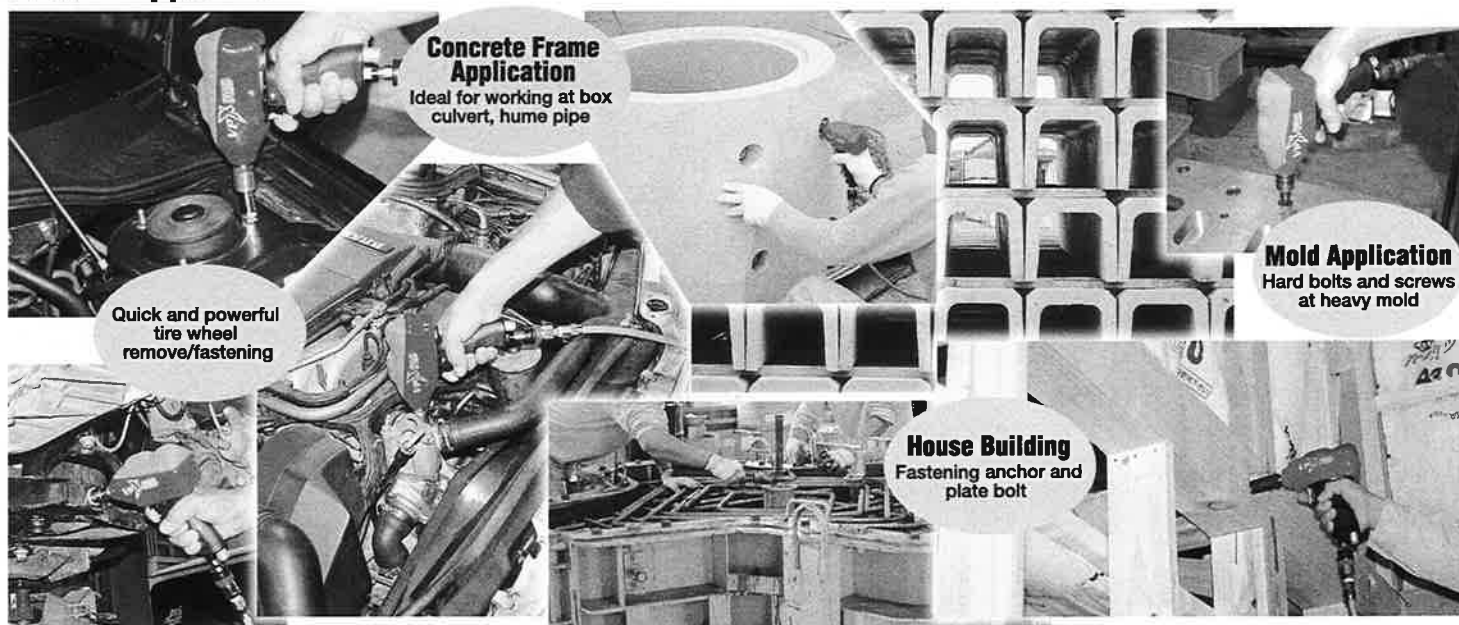

Ideal for other applications such as bolts and nuts at assembly/disassembly of general machineries

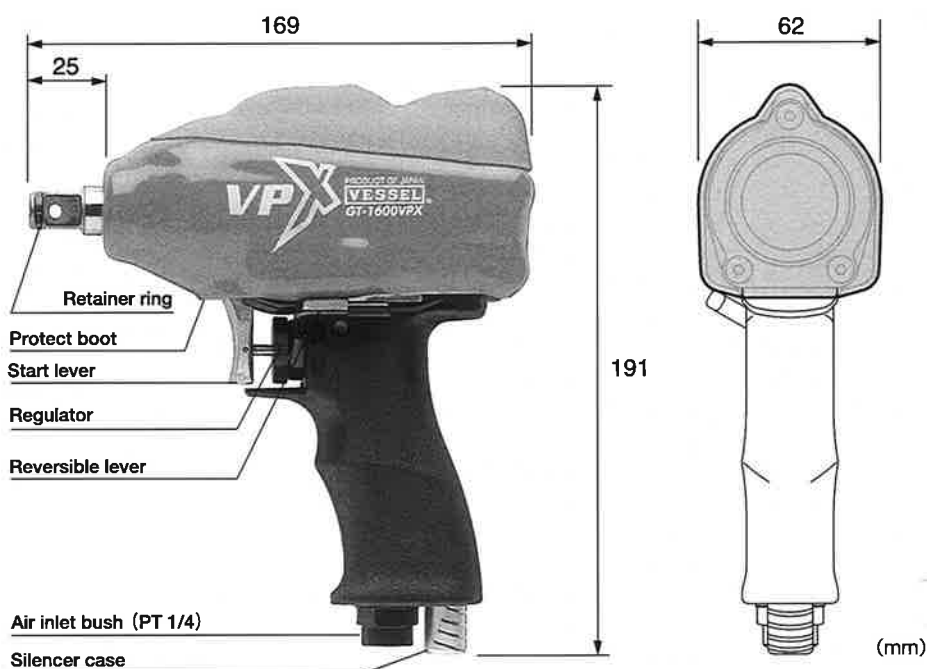

■ Specifications

EDP No.	Model No.	Capacity Bolt Dia.	Square Drive	Working Air Pressure	Free Load rpm	Air Consumption	Air Hose Inner Dia.	Air Hose Coupling	Overall Length	Weight	Accessories
336013	GT-1600VPX	16mm	12.7mm (1/2")	0.6MPa	8,200r.p.m.	0.4m ³ /min	6.35mm	PT1/4	169mm	1.48kg	● "L" Wrench (A/F4mm) 1pc. ● Coupling (BPB-2) 1pc.



Warning

- For your safety use, read operation manual thoroughly in utmost care and never start the operation nor replacement of point tools.
- Use proper working air pressure 0.6MPa at the tool. Avoid the tool use in higher air pressure. This over pressured operation may ruin the mechanism and even dangerous to yourself.

VESSEL CO., INC.
OSAKA, JAPAN

Distributed by