



390mm

330mm



330mm

Main Specification


main opositioation		
Engine	Type Displacement Fuel Tank Capacity Fuel Mixture Ratio Revolution (idling) Revolution (loaded, impact) Revolution (non loaded, max)	: Two Stroke, Air Cooled : 41.5cc : 1 liter : 25-50:1 (Unleaded gasoline: 2 stroke engine oil) : 2,500-3,000rpm : 6,500-6,800rpm : 9,800rpm
Ignition	Type Spark Plug Type	: CDI : NGK PBMR8Y
Carburetor	Туре	: Diaphragm
Impact	Square Driver Size Fastening Torque Range Free Speed	: 25.4mm (1") : 1,700N.m (Full Throttle) : 900N.m (Half Throttle) : 1,200 rpm
Capacity	Bolt Diameter	: 32mm(1 1/4")
Weight	Without fuel	: 19.8kg

GT-3500GE-V-LV Low vibration model



Size	W390 x L680 x H346 (mm)
Weight	21.6kg

● Vibration (m/s²)




* Details are described in separate instruction manuals.

VESSEL Co., Inc.17-25, Fukae-Kita 2-chome, Higashinari-ku, Osaka 537-0001 JAPAN Tel:+ 81 (0)6 6976 7778 Fax:+ 81 (0)6 6972 9441

E-mail:export@vessel.co.jp URL: www.vessel.co.jp/english/

VESSEL EUROPE

8, avenue Johannes Gutenberg 78310 Maurepas FRANCE Tel:+ 33(0)1 69 19 17 42 Fax:+ 33(0)1 69 19 42 20 E-mail:contact@vessel-europe.com URL: www.vessel-europe.com

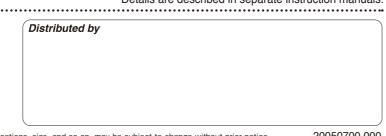

• Specifications, size, and so on, may be subject to change without prior notice.

20050700.000

GASOLINE ENGINE PAGT WRENGH

Pick up and work alone!



<EU>2018/988, <EU>2018/989

MADE IN JAPAN

PORTABLE GASOLINE ENGINE IMPACT WRENCH





Main handle with rubber grip

Going Everywhere, No Electricity, No Air Power, No Motor, etc.



Powerful driving shaft 1"anvil! Applicable for bolts and nuts, rusted and frozen!



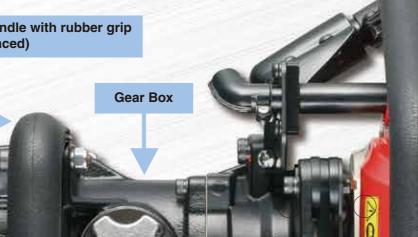

Model No. GT-3500GE-V (EDP No.338601)

Lever support button

Torque adjustment button

Throttle lever



VESSEL **Impact Mechanism**

Reduction Gear Box

Stop switch



Centrifugal Clutch

Gasoline Engine



GASOLINE ENGINE IMPACT WRENCH


















Recoil starter

Choke lever

Create The New Market!