

*Ideal holding position secures less fatigue working!*

**90th**  
90th Year Anniversary  
Memorial Sales Campaign

**No. GT-3800LX** **NEW**

Fastening Bolt 39mm Dia.  
Driving Square 25.4mm or 1"

# High Operative Efficiency with Ergonomic Tilted Handle at 45°!

(PAT.P.)

▲  
Best Weight Balance to reduce the Operator's Fatigue

Noise Silencer with Air Exhaust Outlet combined.

Direction turnable.  
Noise Measure Application

## Light Weight Model for better performance

### Application

Ideal for tire change of Big Truck, Earth Moving Equipment and other Bolts and Nuts.

Retainer Ring and Pin Thru Hole for Big 25.4mm Square Drive

### Center Air Inlet Fitting

Special designed Position at the central part of Rear body for the best and no obstacle disturbing around your working clothes.


### One Unit Control Lever

Instant control for Turn Direction and Air Regulation in your tension operating.

### Unique Ergonomic "Tilted Handle" Newly Developed

Side Operation and Regular Truck/Bus tire change must appreciate this unique tilted handle securing less fatigue continuity of its operation.

Light Weight and High Power series for Automotive Maintenance Impact Wrench

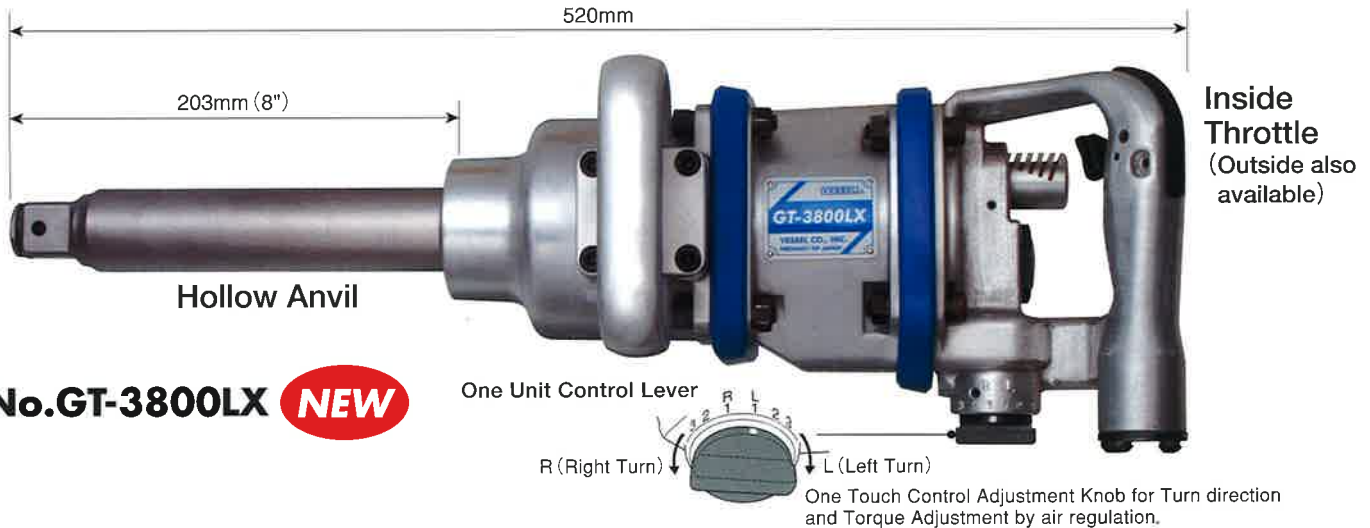


**No.GT-3800LX** **NEW**


EDP No.	Model No.	Capacity (Bolt Dia.)	Working Torque Range	Square Drive	Free Load	Air Consumption	Air Hose Inner Dia.	Overall Length	Weight self	Accessories
335372	<b>GT-3800LX</b>	39mm	353~1607N·m	25.4mm	4,100r.p.m.	0.7m³/min	12.7mm	520mm	9.8kg	"L" Wrench (H5) ...1pc. VESSEL Air Coupling (BPB-4)

●Working Air Pressure....0.6MPa ●Air Hose Coupling....Rc 1/2 (PT Tapered) ●JAN NO. (4907587 303196)  
Regular heavy anvil built-in type is also available (10.8 kg Max.)

High Power Series with Ultra Light Weight Specifications  
Unique V-Hammer Mechanism for Extra Light Weight but High Powered Output!

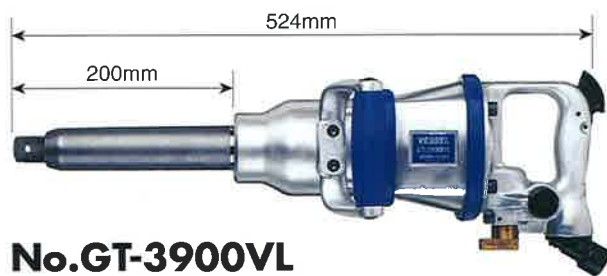

**No.GT-3900VL**

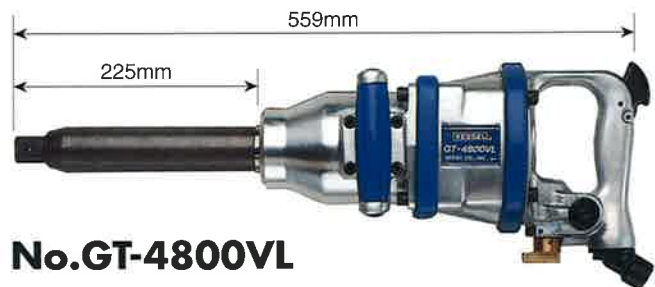

**No.GT-4800VL**

EDP No.	Model No.	Capacity (Bolt Dia.)	Working Torque Range	Square Drive	Free Load	Air Consumption	Air Hose Inner Dia.	Overall Length	Weight self	Accessories
336117	<b>GT-3900VL</b>	39mm	343~1680N·m	25.4mm	4,200r.p.m.	0.7m³/min	12.7mm	524mm	8.95kg	"L" Wrench (H5, H6) ...1pc.each VESSEL Air Coupling (BPB-4)
336121	<b>GT-4800VL</b>	48mm	490~2010N·m	25.4mm	3,200r.p.m.	1.0m³/min	12.7mm	559mm	12.8kg	"L" Wrench (H6) ...1pc. Hose Nipple (1/2"X1/2")

●Working Air Pressure....0.6MPa ●Air Hose Coupling....Rc 1/2 (PT Tapered) ●JAN NO. GT-3900VL (4907587 304889) GT-4800VL (4907587 304872)

**Warning** ●For your safety use, read operation manual thoroughly in utmost care or never start the operation nor replacement of point attached tools.  
●Use Proper air pressure 0.6MPa at the tool, otherwise excessive air pressure shall lead to the damage of the tool and even to fatal injury in addition to poor function.

Manufactured by  
**VESSEL CO., INC.**

17-25, Fukae-Kita 2-chome,  
Higashinari-ku, Osaka 537-0001 Japan  
Tel : +81 6 6976 7778 Fax : +81 6 6972 9441  
E-mail : export@vessel.co.jp  
URL : http://www.vessel.jp

●Subject to change its specifications, sizes, pricing without notification in advance.

Distributed by :