




Dear customers,

The TORX PLUS® has outperformed every other drive system. Its longer tool life and optimal torque transfer.

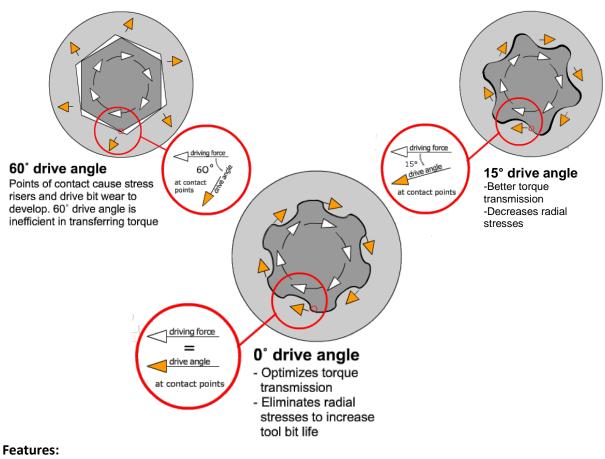

- Elliptical geometric configuration
- Eliminates cam-out •
- Minimizes tool slipping and damage •
- Reduces worker fatigue

Applications:

- Assembly lines
- Screw/Unscrew series
- Wood applications

Can reduce assembly downtime by

reducing the number of bit changes

Reduces annual bits cost



TORX PLUS® is a registered trademark of Acument TM Intellectual Properties, LLC (USA). VESSEL has a manufacturing license in Japan and selling same to the world.

•



6, Avenue du 1er Mai Z.A.E Les Glaises

TEL: (33) 01 69 19 17 42 FAX: (33) 01 69 19 42 20 91120 PALAISEAU, FRANCE Info.vessel-europe@vessel.co.jp TVA Intra. : FR 625 279 41 561

Siret : 527 941 561 00013 Code APE-NAF: 4618Z

Comparison between Hex, TORX[®] and TORX PLUS[®] drive system:



TORX PLUS® Series

VESSEL EUROPE offers various bits for all your applications and keeping stocks.

	DIN3126				(Eco-friendly
DP No. 47209	Model No. IP10605	IP	A	L	· · · · · · · · · · · · · · · · · · ·
		5IP	1.41	49	
47210	IP10705	5IP	1.41	70	
47211	IP10606	6IP	1.64	49	
47212	IP10706	6IP	1.64	70	
47213	IP10806	6IP	1.64	90	
47251	IP10906	6IP	1.64	152	
47215	IP10607	7IP	1.99	49	
47216	IP10707	7IP	1.99	70	
47217	IP10807	7IP	1.99	90	
47252	IP10907	7IP	1.99	152	
47219	IP10608	8IP	2.31	49	
47220	IP10708	8IP	2.31	70	
47221	IP10808	8IP	2.31	90	
47253	IP10908	81P	2.31	152	
47229	IP10609	91P	2.5	49	
47236	IP10709	91P	2.5	70	
7243	IP10809	91P	2.5	90	
7226	IP10909	91P	2.5	152	
7227	IP10610	10IP	2.74	49	and the second s
7228	IP10710	10IP	2.74	70	
244	IP10810	10IP	2.74	90	
254	IP10910	10IP	2.74	152	
230	IP10615	15IP	3.27	49	• 6.35
7237	IP10715	15IP	3.27	70	
245	IP10815	15IP	3.27	90	
255	IP10915	15IP	3.27	152	
7231	IP10620	20IP	3.86	49	
7238	IP10720	20IP	3.86	70	
7246	IP10820	20IP	3.86	90	
47256	IP10920	20IP	3.86	152	
7232	IP10625	25IP	4.43	49	
7239	IP10725	20IP	4.43	70	
7247	IP10825	25IP	4.43	90	
7257	IP10925	25IP	4.43	152	
7233	IP10627	27IP	4.99	49	*
7240	IP10727	27IP	4.99	70	*
7248	IP10827	27IP	4.99	90	*
7258	IP10927	27IP	4.99	152	*
7234	IP10630	30IP	5.52	49	
7241	IP10730	30IP	5.52	70	
7249	IP10830	30IP	5.52	90	
7259		30IP 30IP	5.52	152	
	IP10930		6.65		
7235	IP10640	40IP		49	
17242 17250	IP10740	40IP	6.65	70	
7250	IP10840 IP10940	40IP 40IP	6.65 6.65	90 152	*Production upon your order



91120 PALAISEAU, FRANCE Info.vessel-europe@vessel.co.jp TVA Intra. : FR 625 279 41 561



Drive: ϕ 4mm SHANK DRIVE Wing-shank

EDP No.	Model No.	IP	dφ	l	L	(Eco-friendly
447416	D73 4IP×60	4IP	1.8	20	60	
447417	D73 5IP×60	5IP	2	20	60	, dø
447418	D73 6IP×60	6IP	2.5	20	60	
447419	D73 8IP×60	8IP	3	20	60	
447420	D73 10IP×60	1 OIP	3	20	60	

Drive: ϕ 4mm DRIVE Halfmoon

						Construction of the second sec
EDP No.	Model No.	IP	dφ	l	L	(Eco-friendly
447428	D71 2IP×44	2IP	1.5	20	44	
447412	D71 2IP×64	2IP	1.5	20	64	
447429	D71 3IP×44	3IP	1.7	20	44	
447413	D71 3IP×64	3IP	1.7	20	64	
447402	D71 4IP×44	4IP	1.8	20	44	
447403	D71 4IP×64	4IP	1.8	20	64	dø, 3.5 ⊶ 2
447404	D71 5IP×44	5IP	2	20	44	
447405	D71 5IP×64	5IP	2	20	64	20 11
447406	D71 6IP×44	6IP	2.5	20	44	
447407	D71 6IP×64	6IP	2.5	20	64	
447408	D71 8IP×44	8IP	3	20	44	
447409	D71 8IP×64	8IP	3	20	64	
447410	D71 10IP×44	1 OIP	3	20	44	
447411	D71 10IP×64	1 OIP	3	20	64	

Drive: 1/4"=6.35mm HEX SHANK DIN3126-C6.3

					Contraction of the second second second
EDP No.	Model No.	IP	Α	L	(Eco-mendly
447201	6IP/25	6IP	1.64	25.4	
447202	8IP/25	8IP	2.31	25.4	
447203	10IP/25	1 OIP	2.72	25.4	
447204	15IP/25	1 <i>5</i> IP	3.25	25.4	< -8→
447205	20IP/25	20IP	3.84	25.4	
447206	25IP/25	25IP	4.39	25.4	
447207	30IP/25	30IP	5.49	25.4	← L →
447208	40IP/25	40IP	6.3	25.4	
	4011/20	4011	0.0	20.4	

Don't hesitate to contact us to receive additional information.

Thank you for your trust in VESSEL's products.

We look forward to hearing from you.



6, Avenue du 1er Mai TEL : (33) 01 69 19 17 42 Z.A.E Les Glaises

FAX: (33) 01 69 19 42 20 91120 PALAISEAU, FRANCE Info.vessel-europe@vessel.co.jp TVA Intra. : FR 625 279 41 561

Siret : 527 941 561 00013 Code APE-NAF: 4618Z