

*New*

# AIR IMPACT SCREWDRIVER

No. GT-P5XD

6.35 Bit sleeve type

Standard Screw 4.0~5.0mm / Tapping screw 3.5~4.0mm


**I D E A L !**  
for continuous work



## Oil Extra

Its oil-immersed chamber softens the hammering noise of air tools. This also improved the durability by protecting the hammers and anvil from burning out.

**OIL Xtra**



## Braking effect

Since the striking portion is protected by the oil, the idle of screw loosening is suppressed due to inertia.

**F I R M S T O P !**  
in disassembly



**Metal & Wood working**

Compact

Light

High speed

Low vibration

RoHS





## Dismantling, Recycling work


In the work of removing the screws, brake to a bit rotation due to the inertia of the moment you release your finger from the lever. Enabling continuous operation without the need to stop the rotation by hand.



## Harsh tapping work

Burning out of the striking parts can be prevented by the grease shortage and scattering. Prevent the rotation stop of the unexpected in work.

### Light & high-speed rotation

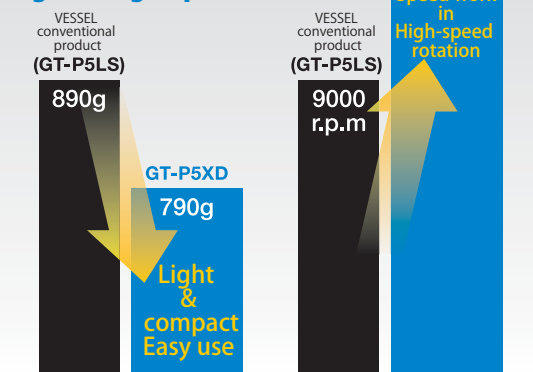

6.35 Bit sleeve type



## Standard screw 4~5mm AIR IMPACT SCREWDRIVER

### No. GT-P5XD

**USE** Window's aluminium frame, metal & wood working, air conditioning, water heaters, refrigerator, TV, kitchen equipment, housing and pneumatic equipment, bicycle, motorcycle, home appliances recycling, OA equipment recycling

#### SPECIFICATIONS The overall length and weight do not include accessories

Model	Screw diam.	Free speed	Air consumption	Overall Length	Weight	Air hose coupling	Air pressure
GT-P5XD	4~5mm	11,000 r.p.m	0.33m <sup>3</sup> /min	172mm	790g	Rc1/4	0.6MPa

● **ACCESSORIES:** Double ended bit A14#2x65G...1PC / Air coupling BPN-2F...1PC / Lubrication oil for rotation mechanism, ISO VG-10 (Clear)...1PC / Lubrication oil for impact mechanism, ISO VG-32 (Light green)...1PC

### No. GT-PLXD

Also available in Straight type



#### SPECIFICATIONS The overall length and weight do not include accessories

Model	Screw diam.	Free speed	Air consumption	Overall Length	Weight	Air hose coupling	Air pressure
GT-PLXD	4~5mm	11,000~12,000 r.p.m	0.35m <sup>3</sup> /min	198.5mm	670g	G1/4	0.6MPa

● **ACCESSORIES:** Double ended bit A14#2x65G...1PC / Air coupling BPN-2F...1PC / Lubrication oil for rotation mechanism, ISO VG-10 (Clear)...1PC / Lubrication oil for impact mechanism, ISO VG-32 (Light green)...1PC

**WARNING** Please read the instruction manual carefully before use. Do not use this air impact wrench or conduct its maintenance before careful reading of the instructions and warnings.  
Due to product improvement, above specifications and measurements are subject to change without notice in prior.

## VESSEL EUROPE

6, Avenue du 1er Mai - ZAE LES GLAISES  
91120 PALAISEAU, FRANCE  
Tel: +33 (0)1 69 19 17 42 Fax: +33 (0)1 69 19 42 20  
contact@vessel-europe.com  
www.vessel-europe.com

Manufactured by  
**VESSEL CO., INC.**  
Osaka, Japan